

CARACTERISTIQUES

- Transmission magnétique
- Modulaire
- Etanche


DESCRIPTION

Le totalisateur est hermétique à l'eau et la poussière, sans remise à zéro et relié au compteur de façon magnétique. Sans presse-étoupe.

CADRAN

Type de compteur	Aiguille	Graduation minimale	Capacité du totalisateur
	[litres]	[litres]	[m ³]
M25	10	0,1	9999,99
M25	100	1	99999,99
M35	100	1	99999,9
M40	100	1	99999,9
M70	100	1	99999,9
M120	100	1	99999,9
M120	1000	10	999999
M170	100	1	99999,9
M170	1000	10	999999

Température maxi	-40 °C / +50 °C
Diamètre du cadran	60 mm
Classe de protection	IP 68

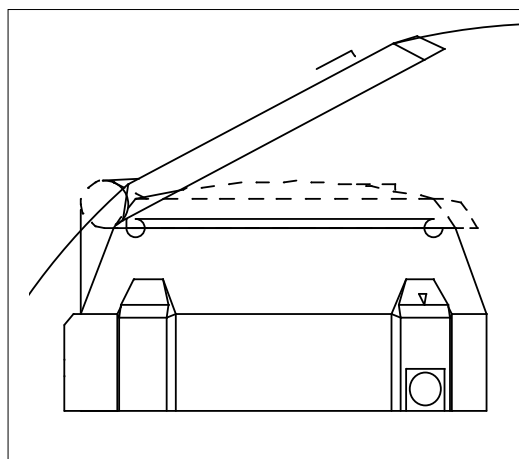

Control. Manage. Optimize.

Dynasonics, AquaCUE and SoloCUE are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.

www.badgermeter.com