

DESCRIPTION

Use the regular manual of the electronic preset meter for most of the functions like calibration and setting up the device.

Powering up:

After powering up the device, the display will be blank. Press the **RESET** button to wake up the device.

Start of a dispense:

Once the order has been prepared on the keypad, press the **RESET** button to take over the job on the device. The assigned valve (indicated with the red led on the frontside) will open immediately. The line is now under pressure and the dispense can be started by opening the manual valve at the end of the hose.

End of a dispense:

Once the preselected quantity has been reached, the solenoid valve will shut off and the result will be sent back to the system.

Remark:

The ongoing dispense can be stopped at any time with the manual valve or the red **STOP** button.

The job will be closed with the **RESET** button and the displayed quantity will be transmitted to the system.

Internal timer:

If the dispense has been stopped in between, the device will close the job – provided that there is no additional dispense within the next 15 minutes.



2.4 GHz


CONTAINS FCC ID: S4GEM35XB
FCC CERTIFIED, PART 15, SUBPART C

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

CONTAINS IC: 8735A-EM35XB

SPECIFICATIONS

Standard power supply - external	100-260 V AC 50-60 Hz, output 24 V DC max. 30 W (IP64) Note: Supply voltage can be changed to 9-24 V DC	
Operating temperature	23...122 °F	-5...+50 °C
Protection class	IP54	
Input signal	Reedswitch 50-200 PPL	
Output signal – voltage & relais	24 V DC 10 W & relais, max. load 6A/250DC / 10A/250AC	
Housing dimension & material	6.57 in. x 3.94 in. x 2.24 in. - PA 850 (black Nylon 11)	167 x 100 x 57 mm - PA 850 (black Nylon 11)
Units	Liters, quarts, pints, gallons	
Totalizer max.	99.999 units	
Max. dispense / Max. preset	99.999 / 999 units	

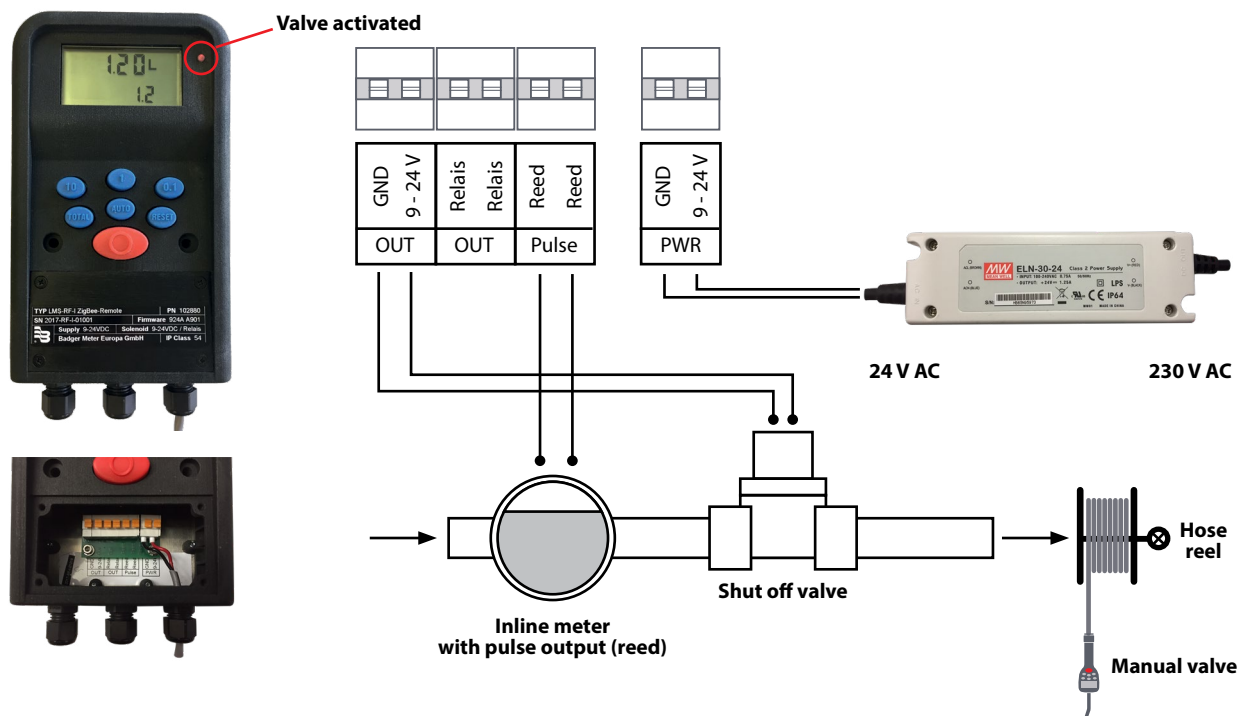

Control. Manage. Optimize.

The trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.