

Ukazovateľ RTR pre prietokomery RCDL s impulzným výstupom

POPIS

Hermeticky uzatvorený ukazovateľ s impulzným výstupom, odolný proti prachu a vode. Ukazovateľ je prepojený s meradlom magnetickým prevodom.

TECHNICKÉ DÁTA



Typ meradla	Otáčka ručičky	Najmenšie odčítanie	Kapacita ukazovateľa	Impulzný výstup
	[l]	[l]	[m³]	Litre/Impulz
M25	10	0,1	9999,99	0,1
M25	100	1	99999,9	0,1
M35	100	1	99999,9	-
M40	100	1	99999,9	0,1
M70	100	1	99999,9	0,1
M120	1000	10	999999	0,01
M170	1000	10	999999	0,01

Maximálna teplota	-40° / +50 °C
Priemer ukazovateľa	60 mm
Krytie	IP 68
Impulzný výstup	FET Tranzistor, bezpotenciálový
Maximálne napájanie	30 VDC / 1 mA
Dĺžka impulzu	8-75 ms / +25°C 15-75 ms / 25°C
Spínací odpor	7,5 Ohm / 25°C


+V	-Odpor R*:
5	2,2 K Ohm
12	10 K Ohm
18	16 K Ohm
24	24 K Ohm

DÔLEŽITÉ

Registre RTR nevysielajú bezpotenciálový kontaktný impulz.

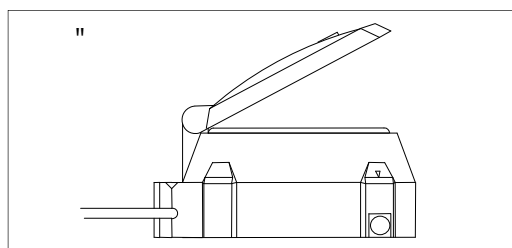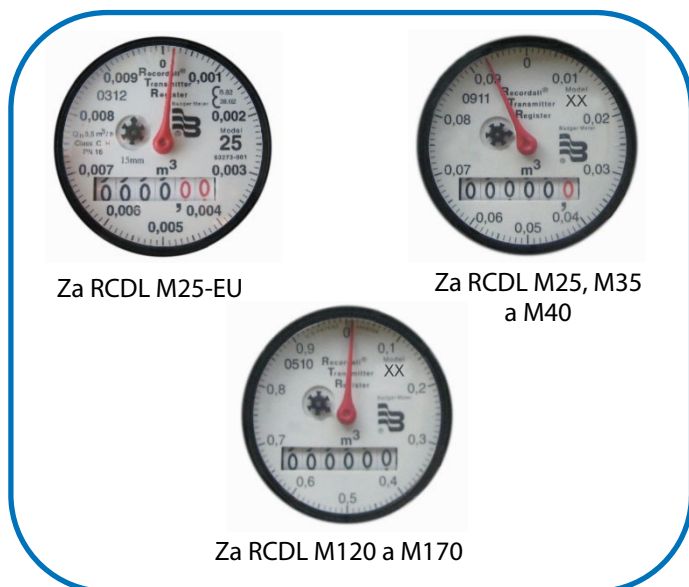

ZAPOJENIE IMPULZNÉHO VÝSTUPU:

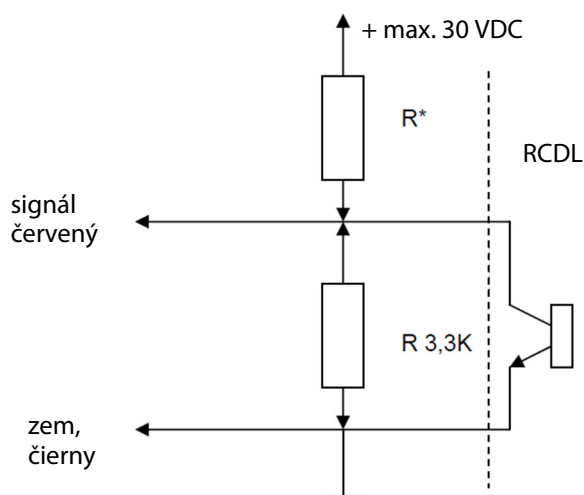

Control. Manage. Optimize.

Dynasonics, AquaCUE and SoloCUE are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.

www.badgermeter.com