

Ellipse® Pitot Tube Meter

BHL Annular Hot Tap Dual Rod

DESCRIPTION

The Preso ELLIPSE® Model BHL (Annular Hot Tap Dual Rod) is a multi-ported, self averaging differential pressure flow element.

CONFIGURATION

The flow element has a two piece construction: an elliptical shape and two 100% independent flow sensing chambers. This construction prevents signal degradation and mixing, and does not require dampening hardware or software. The impact velocity sensing holes are located along the leading edge and the true static sensing holes are on the exterior probe side. This does not generate any vortices or vacuum effects that impinge on the static pressure measurement sensing area and has a drag coefficient of 0.32 or less. Each flow sensor is complete with instrument shutoff valves with provisions to accept a transmitter or direct indicating meter. An identification tag is supplied with specific flow station measurement information, as required.

ACCURACY & REPEATABILITY

The accuracy of the flow element is within $\pm 0.75\%$ with a repeatability of $\pm 0.1\%$ and turndown ratio of 17:1 in the corresponding and appropriate range of Reynolds' Numbers. Certified, independent test data is available from NIST laboratories in similar line sizes as well as in liquids and gases.

APPLICABLE FLUIDS

Liquids and gases.

COMPONENTS

All sensors are furnished with 1/4 in. instrument ball valves, threaded weld fitting, threaded ball valve, threaded insert/retract mechanism with rods, and ID tag as standard equipment. Available options include: Integral 3-valve or 5-valve transmitter mount manifold and integral RTD temperature sensor.



FEATURES

- No separation effects on the low (static) pressure
- Turndown ratio of 17:1
- No vacuum effects
- No vortex generation
- Very high repeatability
- Accuracy of $\pm 0.75\%$ uncalibrated
- Low drag coefficient

SPECIFICATIONS


Name	Specification
Probe Construction	316 Stainless steel
Head	"Y" type, brass 1/8 in. FNPT
Instrument Valves	1/4 in. SAE flare brass ball type
Packing Gland	Molythane with CS cage nipple & close nipple
Retract Assembly	CS rods, nuts & bolts
ID Tag	Polycarbonate
Temperature Maximum *	250° F (120° C)
Pressure Maximum *	400 PSIG (2760 kPa)

* For higher pressure and temperature application please consult factory

PIPE SIZE SPECIFICATIONS


BHL Pipe Size (in.)	ELLIPSE size (in.)	Pipe Mounting	Isolating Valve
2...5	1/2	3/4 in. 3000# CS thread-o-let	3/4 in. Bronze ball valve
6...12	7/8	1-1/4 in. 3000# CS thread-o-let	1-1/4 in. Bronze ball valve
14...24	1-1/4	1-1/2 in. 3000# CS thread-o-let	1-1/2 in. Bronze ball valve

MODEL SELECTOR

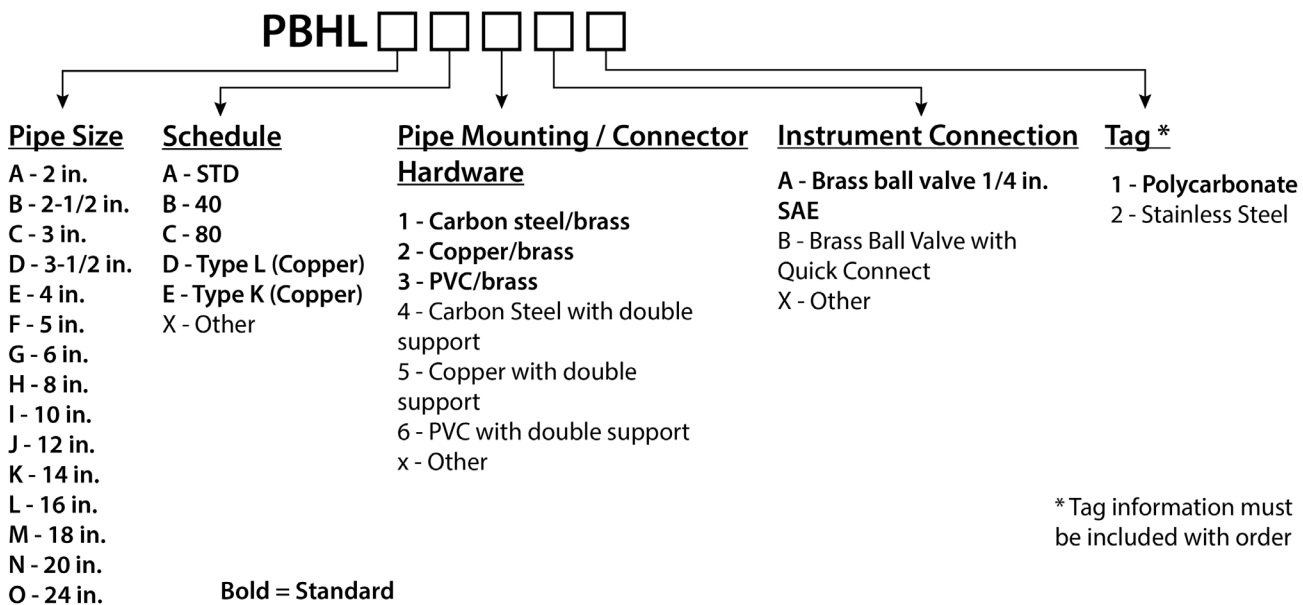

SUBMITTAL DATA

SIZE	MODEL	A HEIGHT inch (mm)	B NPT inch (mm)	C DIA inch (mm)	D DIA inch (mm)	E ELLIPSE inch (mm)
2 in.	PBHLAXXX	22.75 (577.9)	0.75 (19)	0.625 (15.8)	0.5 (12.7)	0.5 (12.7)
2-1/2 in.	PBHLBXXX	24.25 (616)	0.75 (19)	0.625 (15.8)	0.5 (12.7)	0.5 (12.7)
3 in.	PBHLCXXX	23.75 (603.2)	0.75 (19)	0.625 (15.8)	0.5 (12.7)	0.5 (12.7)
3-1/2 in.	PBHLDXXX	24.25 (616)	0.75 (19)	0.625 (15.8)	0.5 (12.7)	0.5 (12.7)
4 in.	PBHLEXXXX	24.25 (616)	0.75 (19)	0.625 (15.8)	0.5 (12.7)	0.5 (12.7)
5 in.	PBHLFXXX	25.75 (654)	0.75 (19)	0.625 (15.8)	0.5 (12.7)	0.5 (12.7)
6 in.	PBHLGXXX	33 (838.2)	1.25 (31.7)	1.0 (25.4)	1.0 (25.4)	0.875 (22.2)
8 in.	PBHLHXXX	35 (889)	1.25 (31.7)	1.0 (25.4)	1.0 (25.4)	0.875 (22.2)
10 in.	PBHLIXXX	37 (939.8)	1.25 (31.7)	1.0 (25.4)	1.0 (25.4)	0.875 (22.2)
12 in.	PBHLJXXX	39 (990.6)	1.25 (31.7)	1.0 (25.4)	1.0 (25.4)	0.875 (22.2)
14 in.	PBHLKXXX	44 (1117.6)	1.5 (38.1)	1.25 (31.7)	1.25 (31.7)	1.25 (31.7)
16 in.	PBHLLXXX	46 (1168.4)	1.5 (38.1)	1.25 (31.7)	1.25 (31.7)	1.25 (31.7)
18 in.	PBHLMXXX	48 (1219.2)	1.5 (38.1)	1.25 (31.7)	1.25 (31.7)	1.25 (31.7)
20 in.	PBHLNXXX	50 (1270)	1.5 (38.1)	1.25 (31.7)	1.25 (31.7)	1.25 (31.7)
24 in.	PBHLOXXX	54 (1371.6)	1.5 (38.1)	1.25 (31.7)	1.25 (31.7)	1.25 (31.7)

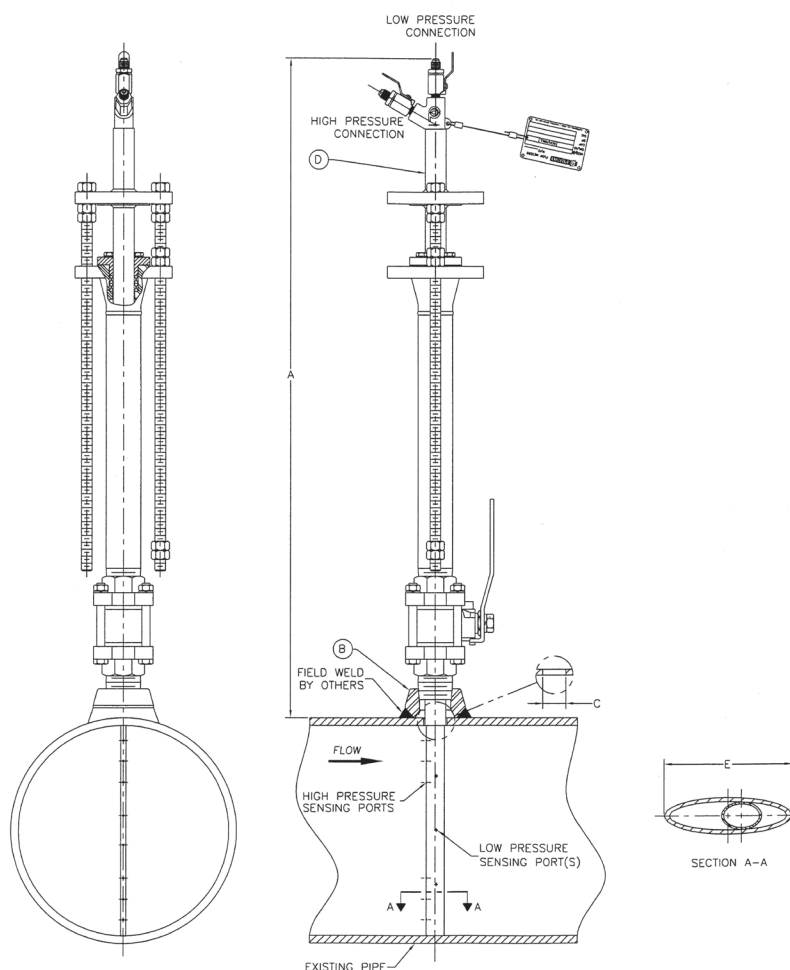

Control. Manage. Optimize.

Preso and Ellipse are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.

www.badgermeter.com