

DESCRIPTION

The Preso Coin Butt Weld Wedge flow meter accommodates most flows, even the most abrasive. This butt weld DP flow meter is designed to be placed and welded within a pipe line for leak-free, long-lasting measurement. This type of wedge meter is effective with liquid, gas and steam applications. This type of differential technology is a proven, consistent measuring technology for media in the upstream, midstream and downstream applications. Accuracy and reliability are achieved by its rugged construction, practical design, and simple principle of operation. It stands alone in its ability to maintain the necessary square root relationship between flow rate and differential pressure for almost any type of flow.

CONFIGURATION

The inlet section is the same diameter as the incoming pipe section and followed by a precise, segmented, angled section equal on both sides for bidirectional flow measurement. The H/ID ratio is determined by the manufacturer according to recognized standards and formulas. The discharge coefficient (Cd) is linear and stable in the operating flow range.

ACCURACY AND REPEATABILITY

The accuracy of the Coin meter is within $\pm 3.0\%$ (uncalibrated) and $\pm 0.5\%$ (calibrated) with a repeatability of $\pm 0.2\%$ and turndown of 10:1 in the corresponding range of Reynolds' Numbers. For custody transfer applications the Coin meter is flow tested by an independent NIST certified laboratory under the design operating conditions and piping configurations.

APPLICATIONS


Typical core applications for Wedge meters include high-viscosity fluids, slurries, corrosive fluids, contaminated air/gas, and more.

DIFFERENTIATOR

The wedge meter functions similarly to a segmental orifice. A segmental orifice still has a small restriction in the line around the opening. The wedge design allows solids and particulates to be swept through the opening. It also enables measurements with Reynolds Numbers down in the laminar range to 500 as a minimum. Wedge meters generally have a higher turndown ratio than segmental orifice plates.

BENEFITS

- Abrasive and Erosive Slurries, Viscous and Dirty Fluids, Clean Fluids, Steam or Gasses

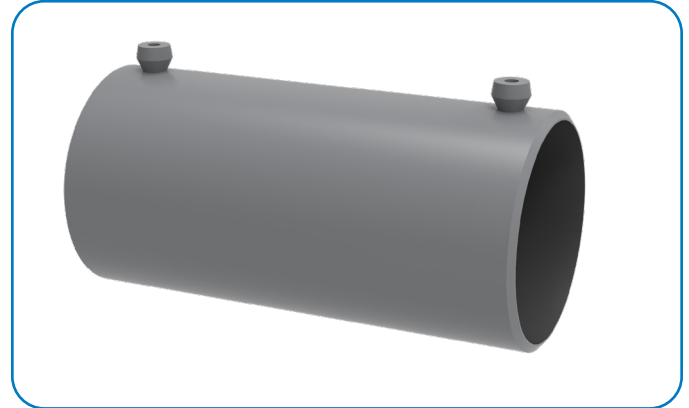

- Easily installed in any position with minimal straight pipe requirements
- Resists wear, maintenance free (no moving parts)
- Bi-Directional flow measurement

FEATURES


- Turndown ratio: 10:1
- Mass flow output with multivariable transmitter (accuracy $\pm 0.5\%$ calibrated)
- Repeatability: $\pm 0.2\%$ of readings
- Reynolds number measurement down to 300
- High viscosity measurement to 3000 and higher
- Sizes 0.5...40 in.
- Manufactured to ASME, ANSI B31.1, NACE MR-0175, CSA-Z299.3
- ISO-9001 certified design and fabrication

SPECIFICATIONS

Applications	Water, oil, steam, air/gas, sludge\slurries, molten rubber, molten sulfur, asphalt, crude oil, polymers, phenol resin, ammonia gas, hot tar, pulp stock, wet gases, other liquids.
Pipe Sizes	0.5...40 in. (13...406.40 mm)
Temperature Range	Up to 800° F (426.67° C)
Pressure Range	Depends on flange rating
Accuracy	$\pm 3.0\%$ uncalibrated; up to 0.5% calibrated
Repeatability	$\pm 0.2\%$
Turndown Ratio	10:1

PART NUMBERING CONSTRUCTION

COIN® Segmented
Wedge 316 SS, SCH STD
BUTT WELD



PCO

		2		
--	--	---	--	--

Continued on
next page**PIPE SIZE**

1/2"
3/4"
1"
1-1/4"
1-1/2"
2"
2-1/2"
3"
4"
5"
6"
8"
10"
12"
14"
16"
Call for extended sizes

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
X

SCHEDULE

STD
Call for extended Schedules

A

BODY / WEDGE MATERIAL

316/316L Body / 316/316L Wedge

2

PROCESS CONNECTION

Butt Weld

E

INSTRUMENT CONNECTION

1/4" NPT (1/2...3" NPS)
1/2" NPT (>3" NPS) 1/2"
Socket Weld


H
I
J

BETA

(0.2) Low Flow
(0.3) Med/Low Flow
(0.4) Normal Flow
(0.5) High Flow

1
2
3
4

COIN® Segmented
Wedge 316 SS, Standard
XS BUTT WELD



PCO

		2		
--	--	---	--	--

Continued on
next page**PIPE SIZE**

1/2"
3/4"
1"
1-1/4"
1-1/2"
2"
2-1/2"
3" 4"
5" 6"
8" 10"
12"
14"
16"
Other

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
X

SCHEDULE

XS
Call for extended Schedules

L

BODY / WEDGE MATERIAL

316/316L Body / 316/316L Wedge

2

PROCESS CONNECTION

Butt Weld

E

INSTRUMENT CONNECTION

1/4" NPT (1/2...3" NPS)
1/2" NPT (>3" NPS) 1/2"
Socket Weld

H
I
J

BETA

(0.2) Low Flow
(0.3) Med/Low Flow
(0.4) Normal Flow
(0.5) High Flow

1
2
3
4

Continued from
previous page

--	--	--	--	--	--	--	--

INSTRUMENT VALVE

Not Required	Z
1/4" Needle CS	A
1/2" Needle CS	B
1/4" Needle SS	C
1/2" Needle SS	D
1/2" Gate w/Cross CS (Steam)	E
1/2" Gate w/Cross SS (Steam)	F

CALIBRATION

Not Required	Z
Factory Calibration (6 point)	1
Special Factory Calibration	2
External Calibration	3

TRANSMITTER MOUNTING

Remote Mount	Z
Mounting Bracket Tee (only)	2
Manifold Mounting Plate- Meter Mount (Does not include manifold)	3

CERTIFICATIONS

None	Z
Tracable Material Certifications	1
NACE MR0-103	2
NACE MR0-175	3
Items 1 and 2	4
Items 1 and 3	5
Other	X

STANDARD NDE TESTING

None	Z
Hydrostatic Test Only (1/2...12" NPS 150# to 900# flange - Others CF)	1
5% Radiography of Butt Welds	2
100% Radiography of Butt Welds	3
5% Magnetic particle/dye penetrant	4
100% magnetic particle/dye penetrant	5
Items 2 and 4 (1/2...12" NPS - Others CF)	6
Items 3 and 4 (1/2...12" NPS - Others CF)	7
Items 3 and 5 (1/2...12" NPS - Others CF)	8
Other	X

Note: Items 2-8 also include hydrostatic testing**OTHER NDE TESTING**

None	Z
100% Visual Inspection with Report	1
PMI (Positive Material Identification)	2
Post-Weld Harness Testing	3
Items 1 and 2	4
Items 3 and 4	5
Items 1, 2 and 3	6


HARDCOATING

None	Z
Tungsten Carbide (WC) on wedge	1
Tungsten Carbide (WC) on center 1/3 of meter	2
Chromium Carbide (CrC) on wedge	3
Chromium Carbide (CrC) on center 1/3 of meter	4
Other	X

TERTIARY TAP

None	Z
3/4" Standard RTD Temperature with Thermowell (-200... 450° F)	A
3/4" High Temperature RTD Temperature (-200...1000° F)	B
1/2" Pressure Tap w/o transmitter	C
1/2" Pressure Absolute with transmitter	D
1/2" Pressure Gauge with transmitter	E

COIN® Segmented Wedge
316 SS, Standard 160
Butt Weld



PCO

-

2

Continued on
next page

PIPE SIZE

1/2"
3/4"
1"
1-1/4"
1-1/2"
2"
2-1/2"
3"
4"
5"
6"
8"
10"
12"
14"
16"

Call for extended sizes

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
X

SCHEDULE

160

Call for extended Schedules

K

BODY / WEDGE MATERIAL

316/316L Body / 316/316L Wedge

2

PROCESS CONNECTION

Butt Weld

E

INSTRUMENT CONNECTION

1/4" NPT (1/2...3" NPS)

1/2" NPT (>3" NPS) 1/2"

Socket Weld

H
I
J

BETA

(0.2) Low Flow

(0.3) Med/Low Flow

(0.4) Normal Flow

(0.5) High Flow

1
2
3
4

Continued from
previous page

--	--	--	--	--	--	--	--

INSTRUMENT VALVE

Not Required	Z
1/4" Needle CS	A
1/2" Needle CS	B
1/4" Needle SS	C
1/2" Needle SS	D
1/2" Gate w/Cross CS (Steam)	E
1/2" Gate w/Cross SS (Steam)	F

CALIBRATION

Not Required	Z
Factory Calibration (6 point)	1
Special Factory Calibration	2
External Calibration	3

TRANSMITTER MOUNTING

Remote Mount	Z
Mounting Bracket Tee (only)	2
Manifold Mounting Plate- Meter Mount (Does not include manifold)	3

CERTIFICATIONS

None	Z
Tracable Material Certifications	1
NACE MR0-103	2
NACE MR0-175	3
Items 1 and 2	4
Items 1 and 3	5
Other	X

STANDARD NDE TESTING

None	Z
Hydrostatic Test Only (1/2...12" NPS 150# to 900# flange - Others CF)	1
5% Radiography of Butt Welds	2
100% Radiography of Butt Welds	3
5% Magnetic particle/dye penetrant	4
100% magnetic particle/dye penetrant	5
Items 2 and 4 (1/2...12" NPS - Others CF)	6
Items 3 and 4 (1/2...12" NPS - Others CF)	7
Items 3 and 5 (1/2...12" NPS - Others CF)	8
Other	X

Note: Items 2-8 also include hydrostatic testing**OTHER NDE TESTING**

None	Z
100% Visual Inspection with Report	1
PMI (Positive Material Identification)	2
Post-Weld Harness Testing	3
Items 1 and 2	4
Items 3 and 4	5
Items 1, 2 and 3	6

HARDCOATING

None	Z
Tungsten Carbide (WC) on wedge	1
Tungsten Carbide (WC) on center 1/3 of meter	2
Chromium Carbide (CrC) on wedge	3
Chromium Carbide (CrC) on center 1/3 of meter	4
Other	X


TERTIARY TAP

None	Z
3/4" Standard RTD Temperature with Thermowell (-200... 450° F)	A
3/4" High Temperature RTD Temperature (-200...1000° F)	B
1/2" Pressure Tap w/o transmitter	C
1/2" Pressure Absolute with transmitter	D
1/2" Pressure Gauge with transmitter	E

COIN® Back to Back Wedge

CS W/SS - SCH STD

Butt Weld



PCO

--	--	--	--	--	--

Continued on
next page**PIPE SIZE**

1/2"

3/4"

1"

1-1/4"

1-1/2"

2"

2-1/2"

3"

4"

5"

6"

8"

10"

12"

14"

16"

Call for extended sizes

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

X

SCHEDULE

STD

A

Call for extended Schedules

BODY / WEDGE MATERIAL

CS Body / 316/316L Wedge

3

PROCESS CONNECTION

Butt Weld

E

INSTRUMENT CONNECTION

1/4" NPT (1/2...3" NPS)

H

1/2" NPT (>3" NPS)

I

1/2" Socket Weld

J

BETA

(0.2) Low Flow

1

(0.3) Med/Low Flow

2

(0.4) Normal Flow

3


(0.5) High Flow

4

COIN® Back to Back Wedge

CS W/SS - SCH XS

Butt Weld



PCO

--	--	--	--	--	--

Continued on
next page**PIPE SIZE**

1/2"

3/4"

1"

1-1/4"

1-1/2"

2"

2-1/2"

3"

4"

5"

6"

8"

10"

12"

14"

16"

Call for extended sizes

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

SCHEDULE

XS

L

Call for extended Schedules

BODY / WEDGE MATERIAL

CS Body / 316/316L Wedge

3

PROCESS CONNECTION

Butt Weld

E

INSTRUMENT CONNECTION

1/4" NPT (1/2...3" NPS)

H

1/2" NPT (>3" NPS)

I

1/2" Socket Weld

J

BETA

(0.2) Low Flow

1

(0.3) Med/Low Flow

2

(0.4) Normal Flow

3

(0.5) High Flow


4

Continued from
previous page

--	--	--	--	--	--	--	--

<u>INSTRUMENT VALVE</u>									
Not Required	Z								
1/4" Needle CS	A								
1/2" Needle CS	B								
1/4" Needle SS	C								
1/2" Needle SS	D								
1/2" Gate w/Cross CS (Steam)	E								
1/2" Gate w/Cross SS (Steam)	F								
<u>CALIBRATION</u>									
Not Required	Z								
Factory Calibration (6 point)	1								
Special Factory Calibration	2								
External Calibration	3								
<u>TRANSMITTER MOUNTING</u>									
Remote Mount	Z								
Mounting Bracket Tee (only)	2								
Manifold Mounting Plate- Meter Mount (Does not include manifold)	3								
<u>CERTIFICATIONS</u>									
None	Z								
Tracable Material Certifications	1								
NACE MR0-103	2								
NACE MR0-175	3								
Items 1 and 2	4								
Items 1 and 3	5								
Other	X								
<u>STANDARD NDE TESTING</u>									
None	Z								
Hydrostatic Test Only (1/2...12" NPS 150# to 900# flange - Others CF)	1								
5% Radiography of Butt Welds	2								
100% Radiography of Butt Welds	3								
5% Magnetic particle/dye penetrant	4								
100% magnetic particle/dye penetrant	5								
Items 2 and 4 (1/2...12" NPS - Others CF)	6								
Items 3 and 4 (1/2...12" NPS - Others CF)	7								
Items 3 and 5 (1/2...12" NPS - Others CF)	8								
Other	X								
Note: Items 2-8 also include hydrostatic testing									
<u>OTHER NDE TESTING</u>									
None	Z								
100% Visual Inspection with Report	1								
PMI (Positive Material Identification)	2								
Post-Weld Harness Testing	3								
Items 1 and 2	4								
Items 3 and 4	5								
Items 1, 2 and 3	6								
<u>HARDCOATING</u>									
None	Z								
Tungsten Carbide (WC) on wedge	1								
Tungsten Carbide (WC) on center 1/3 of meter	2								
Chromium Carbide (CrC) on wedge	3								
Chromium Carbide (CrC) on center 1/3 of meter	4								
Other	X								
<u>TERTIARY TAP</u>									
None								Z	
3/4" Standard RTD Temperature with Thermowell (-200...450° F)								A	
3/4" High Temperature RTD Temperature (-200...1000° F)								B	
1/2" Pressure Tap w/o transmitter								C	
1/2" Pressure Absolute with transmitter								D	
1/2" Pressure Gauge with transmitter								E	

COIN® Back to Back Wedge
CS W/SS - SCH 160
Butt Weld



PCO

-

--	--	--	--	--	--

Continued on
next page

PIPE SIZE

1/2"

3/4"

1"

1-1/4"

1-1/2"

2"

2-1/2"

3"

4"

5"

6"

8"

10"

12"

14"

16"

Call for extended sizes

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

X

SCHEDULE

160

A

Call for extended Schedules

BODY / WEDGE MATERIAL

CS Body / 316/316L Wedge

3

PROCESS CONNECTION

Butt Weld

E

INSTRUMENT CONNECTION

1/4" NPT (1/2...3" NPS)

H

1/2" NPT (>3" NPS)

I

1/2" Socket Weld

J

BETA

(0.2) Low Flow

1

(0.3) Med/Low Flow

2

(0.4) Normal Flow

3

(0.5) High Flow

4

Continued from
previous page

--	--	--	--	--	--	--	--

INSTRUMENT VALVE

Not Required
 1/4" Needle CS
 1/2" Needle CS
 1/4" Needle SS
 1/2" Needle SS
 1/2" Gate w/Cross CS (Steam)
 1/2" Gate w/Cross SS (Steam)

Z
 A
 B
 C
 D
 E
 F

CALIBRATION

Not Required
 Factory Calibration (6 point)
 Special Factory Calibration
 External Calibration

Z
 1
 2
 3

TRANSMITTER MOUNTING

Remote Mount
 Mounting Bracket Tee (only)
 Manifold Mounting Plate- Meter Mount (Does not include manifold)

Z
 2
 3

CERTIFICATIONS

None
 Tracable Material Certifications
 NACE MR0-103
 NACE MR0-175
 Items 1 and 2
 Items 1 and 3
 Other

Z
 1
 2
 3
 4
 5
 X

STANDARD NDE TESTING

None
 Hydrostatic Test Only (1/2...12" NPS 150# to 900# flange - Others CF)
 5% Radiography of Butt Welds
 100% Radiography of Butt Welds
 5% Magnetic particle/dye penetrant
 100% magnetic particle/dye penetrant
 Items 2 and 4 (1/2...12" NPS - Others CF)
 Items 3 and 4 (1/2...12" NPS - Others CF)
 Items 3 and 5 (1/2...12" NPS - Others CF)
 Other

Z
 1
 2
 3
 4
 5
 6
 7
 8
 X

Note: Items 2-8 also include hydrostatic testing**OTHER NDE TESTING**

None
 100% Visual Inspection with Report
 PMI (Positive Material Identification)
 Post-Weld Harness Testing
 Items 1 and 2
 Items 3 and 4
 Items 1, 2 and 3

Z
 1
 2
 3
 4
 5
 6

HARDCOATING

None
 Tungsten Carbide (WC) on wedge
 Tungsten Carbide (WC) on center 1/3 of meter
 Chromium Carbide (CrC) on wedge
 Chromium Carbide (CrC) on center 1/3 of meter
 Other

Z
 1
 2
 3
 4
 X

TERTIARY TAP

None
 3/4" Standard RTD Temperature with Thermowell (-200...450° F)
 3/4" High Temperature RTD Temperature (-200...1000° F)
 1/2" Pressure Tap w/o transmitter
 1/2" Pressure Absolute with transmitter
 1/2" Pressure Gauge with transmitter

Z
 A
 B
 C
 D
 E

INTENTIONAL BLANK PAGE

INTENTIONAL BLANK PAGE

Control. Manage. Optimize.

Preso and Coin are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.

www.badgermeter.com